
Super Service Ride Control®

Reduces wear and keeps the bogie square

- Constant damped bogie
- Wide-winged friction wedge
 - Provides good stability
 - Keeps bogie square as components wear
- Up to 286,000 pound Gross Rail Load/ 32.5 tonne Axle Load



SUPER SERVICE RIDE CONTROL COMMON CONFIGURATIONS								
Designation	Track Gauge	Journal Size	Axle Load	Wheel Diameter	Wheel Base	Center Bowl	Spring Type	Additional Description
2-9449	1067mm	6 X 11	20t	768mm 30"	1575mm 62"	312mm 12"	AAR	ADAPTER PLUS
AR-764	1067mm	6 ½ X 9	26.5t	914mm 36"	1778mm 70"	356mm 14"	AAR	BOLTED POCKET WEAR PLATES TRUCK MOUNTED BRAKES
AR-768	1067mm	6 ½ X 9	30t	914mm 36"	1778mm 70"	356mm 14"	AAR	BOLTED POCKET WEAR PLATES
AR-762	1435mm	6 X 11	25t	914mm 36"	1727mm 68"	406mm 16"	AAR	ADAPTER PLUS
AR-770	1435mm	6 X 11	25t	840mm 33"	1727mm 68"	356mm 14"	AAR	ADAPTER PLUS
AR-3453	1435mm	6 ½ X 12	30t	914mm 36"	1778mm 70"	406mm 16"	AAR	CAST-IN SIDE BEARING CAGE
AR-3384	1435mm	6 ½ X 12	32.5t	914mm 36"	1778mm 70"	406mm 16"	AAR	STANDARD ADAPTER
AR-3434	1435mm	6 ½ X 9	32.5t	914mm 36"	1778mm 70"	406mm 16"	AAR	ADAPTER PLUS

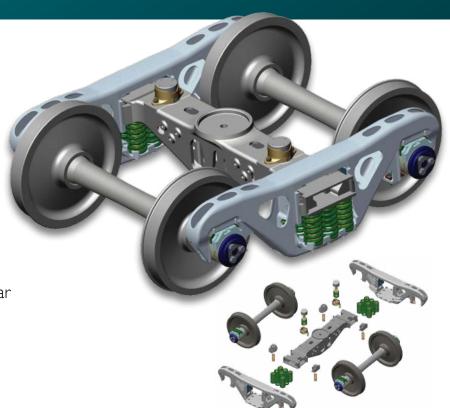

Amsted Rail, the global leader in fully integrated freight car systems for the heavy haul rail market.



Amsted Rail has been an industry leader in freight railroading for more than 100 years.

Our experience, dedication and efficiency in servicing today's demanding heavy haul operations is unequaled as we keep railcars rolling in some of the world's toughest railroad environments.

To learn more visit www.amstedrail.com